

Desk socket 3x +USB A+C retractable, stainless steel design, round

Item No. 23917

Product description:

Retractable 3-way socket for installation in a desk, workshop table or worktop with 2 additional USB charging sockets for smartphones, tablets, etc.

Technical details:

- ideal for worktops or workbenches
- Socket inside already pre-wired
- Operation at 230V / 50Hz,
- 1.5m connection cable with protective contact plug
- Hole Ø 100mm • Front Ø 115mm • Depth 105mm
- Base height 57mm (extended)
- matching hole saw #23455 100mm
- 3x safety socket: total max. 16A/3,600W
- Do not connect one after the other - only single operation allowed!



USB performance data & energy efficiency (ecodesign)

- USB-A 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A DC max.18.0W
- USB-C 5.0V/3.0A, 9.0V/2.2A, 12.0V/1.67A DC max. 20.0W
- USB-A+C 5.0V/3.4A DC max. 17.0W

Average active efficiency: 82.74% Efficiency at 10% load:

74.04% Standby power (No-load power): 0.08W

Intended Use

The USB connection sockets have an output voltage of 5V ($\pm 5\%$). This makes the USB connections suitable for charging mobile devices such as cell phones, tablets or MP3 players. The products are only suitable for use in dry indoor areas: Using non-standard cables or plugs can damage the socket and/or the connected devices. The USB plug should always be inserted carefully and without applying too much pressure. Make sure that the plug is not tilted. To assess the charging time and battery performance, you should check the manufacturer's information for the device to be connected. A fully charged device must not be left in the charging socket. The USB-A plug can only be inserted from one side.



Safety instructions and important information!


To ensure safety at all times and to use the full performance range of the device, please read the safety instructions carefully and thoroughly!

The product must not be modified technically or mechanically, otherwise the operating license and conformity will expire with immediate effect! The type plate / print must not be removed under any circumstances! Check the product for damage before each use. If damage is visible on the product, it must be checked, repaired or replaced by a specialist company and disposed of in accordance with the applicable guidelines (footer page 1). Under no circumstances must a damaged or defective product be used! Please keep all packaging material and accessories, especially small parts such as screws and foil, away from children and animals. Danger of suffocation! The manufacturer accepts no liability for damage to property or personal injury if the instructions are not followed or if the product is used improperly, for purposes other than those intended, or if modifications are made to the product. This product must never be operated, kept, put down or stored within reach of children or animals. Keep these instructions in a safe place. If this product is passed on, the instructions and packaging must be passed on. Thank you! We reserve the right to make printing errors or changes to the packaging, the product or the instructions.


Electronic products marked with the crossed-out waste bin do not belong in household waste! You can return these products free of charge to municipal collection points. Ask your local authority, the responsible town hall or a local or municipal waste disposal company. Thank you. Old batteries must not be disposed of in household waste. Consumers are legally obliged to take batteries to a suitable collection point at a retailer or municipality. Old batteries may contain pollutants or heavy metals that can harm the environment and health. The symbols under the label (waste bin) stand for: Pb: battery contains lead, Cd: battery contains cadmium Hg: battery contains mercury. The environment and ChiliTec say thank you.

Dimensions in mm:

Item No. 23917

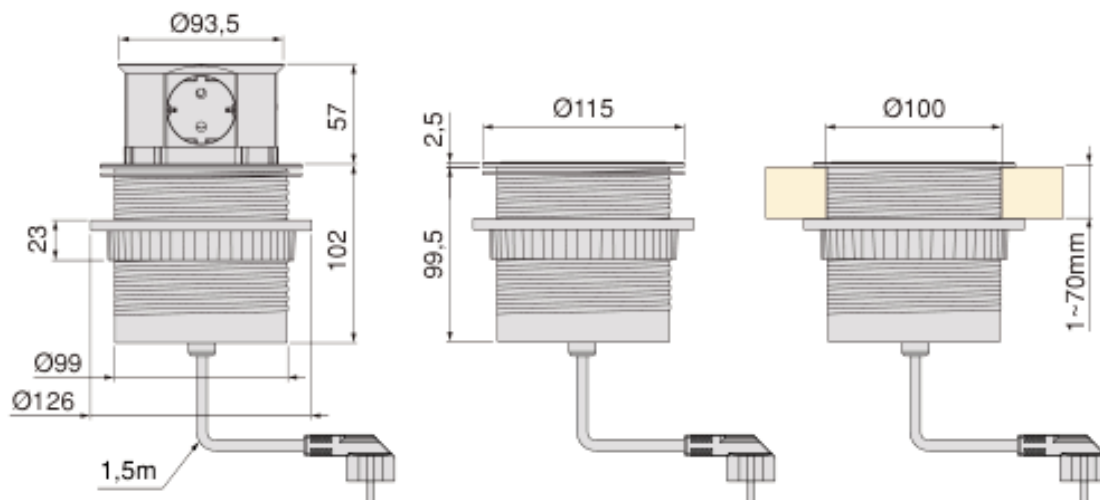

Installation:

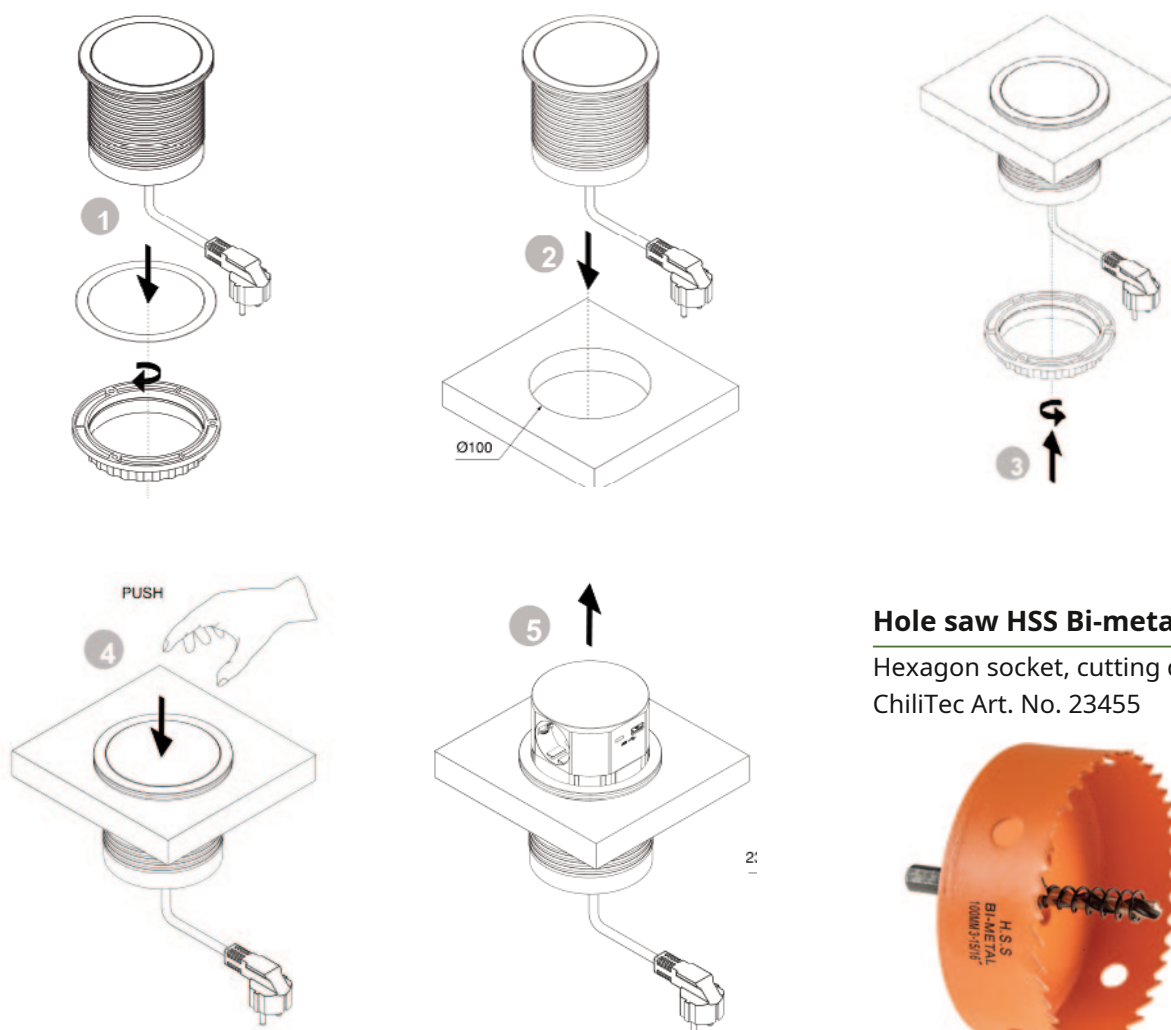

Item No. 23455

Hole saw HSS Bi-metal Ø100mm

Hexagon socket, cutting depth 38mm
ChiliTec Art. No. 23455



... to the article

... ideal for installation (can be ordered optionally)